

170

TRAILER MOUNTED ACCESS PLATFORM



56ft 1in (17.10m)
Working height

28ft 6in (8.70m)
Working outreach

Telescopic Upper Boom

Greater accuracy when positioning platform

Hydraulic Outriggers
For quick & easy setup

Fully Proportional Hydraulic Controls

Simple, reliable & easy to maintain

Bi-Energy Available Optimising utilisation










mifty 170

With one of the largest working envelopes in its class the Nifty 170 delivers maximum reach with stability and control. Octagonal boom sections provide strength without compromising on weight and the telescopic upper boom improves accuracy when positioning the platform. Hydraulically operated outriggers and controls make setting up and operating quick and easy, especially on uneven surfaces.

SAFETY FEATURES

- Pressure Sensitive Outriggers
- Audible and Visible Alarms
- Manual Recovery with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Overrun Brakes with Gas Spring Hand Brake
- Dual Harness Points
- CE Marked

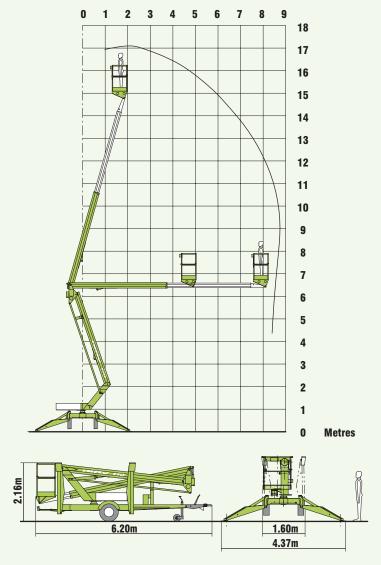


Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.



The 170's outstanding reach makes it ideal for a wide range of applications.



Also available on a self-drivable 2x4 or 4x4 base, the Nifty 170SD.





SPECIFICATIONS

| Working Height | 17.10m | 56ft 1in |
|--|------------------------------|----------------------|
| Platform Height | 15.10m | 49ft 6in |
| Working Outreach | 8.70m | 28ft 6in |
| Slew | 360° | |
| Width - Travelling | 1.60m | 5ft 3in |
| - Working | 4.37m | 14ft 4in |
| Height - Overall | 2.16m | 7ft 1in |
| Length - Overall | 6.20m | 20ft 4in |
| Weight | 1,900kg - 2,000kg* | 4,180lbs - 4,400lbs* |
| Platform Rotation** | 100° | |
| Platform Capacity | 200kg | 4400lbs |
| Platform Size | 1.10m x 0.65m | 3ft 8in x 2ft 1in |
| Control System | Fully Proportional Hydraulic | |
| Power System | Mains Only | |
| | Battery Only | |
| | Gas or Diesel Only | |
| | Bi-Energy (engine & b | oattery) |
| Drive Option | Traction Drive | |
| * Weights may vary asserting to appoin | | |

^{*} Weights may vary according to specification / power options, please confirm before ordering.

Supplied by:



Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.



NIFTYLIFT LTD Fingle Drive Stonebridge Milton Keynes MK13 OER England

www.niftylift.com e-mail: info@niftylift.com Tel.: +44 (0) 1908 223456 Fax.: +44 (0) 1908 312733

^{**} Option Available on request.