



SPECIFICATION SHEET

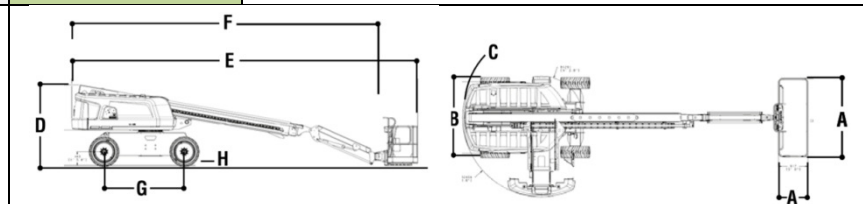

P48-660SJ

Platform Height	20,02 m
Horizontal Outreach (platform 90°)	18,12 m
Swing (Continuous)	360°
Platform Capacity – Unrestricted	☺☺ / 250 kg
Platform Capacity – Restricted	☺☺☺ / 340 kg
Platform Rotator (Hydraulic)	180°
Jib – Overall Length	1,83 m
Jib - Range of articulation	130° (+70°/-60°)
A, Platform Size	0,8 m x 4,0 m
B, Overall Width	2,48 m
C, Tailswing (working condition)	1,22 m
D, Stowed Height	2,50 m
E, Stowed Length (platform 90°)	11,49 m
F, Wheelbase	2,51 m
G, Ground Clearance	0,29 m
Machine weight	11.920 kg
Maximum Ground Bearing Pressure	6,1 kg/cm ²
Drive Speed	6,3 km/h
Gradeability	45%
Tyres	355/55D625 Foam F.
Axle Oscillation	0,20 m
Turning Radius – Outside 2WS	5,96 m
Diesel Engine	Deutz 2011DL04
Fuel Tank Capacity	117 l
Auxiliary Power	12V DC

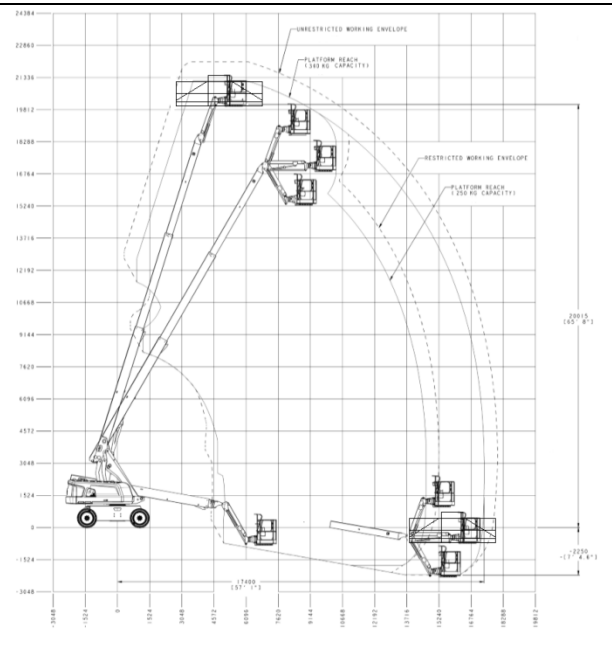

SPS is continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight and/or dimensions. Specifications may change to meet country standards or with the addition of optional equipment.

Smart Platform Solutions B.V. • Bolwerksepoort 22 • NL-2152 HD Nieuw-Vennep • the Netherlands
 e-mail: info@sps-bv.nl • KvK Amsterdam: 60295449 • BTW: NL8538.47.605
 IBAN: NL08INGB 0006.3461.01 • BIC: INGBNL2A